


# VIBRATION MANAGEMENT CORPORATION

3532-A EAST TC JESTER , BROOKWOOD BUSINESS PARK , HOUSTON , TEXAS 77018 , U.S.A

INTERNET ADDRESS: [www.vimco.biz](http://www.vimco.biz)

MODEL	PART DIMENSIONS (inches) ROD / BOLT SIZE	A	B	CABLE DIA. (inches)	MAXIMUM DESIGN LOAD (lbs)
SCRS-01-04	3/8	4 5/16	2	1/8	975
SCRS-01-05	1/2				
SCRS-01-06	5/8				
SCRS-01-07	3/4				
SCRS-02-04	3/8	5	2 1/4	3/16	2050
SCRS-02-05	1/2				
SCRS-02-06	5/8				
SCRS-02-07	3/4				
SCRS-03-04	3/8	5	2 5/8	1/4	3150
SCRS-03-05	1/2				
SCRS-03-06	5/8				
SCRS-03-07	3/4				

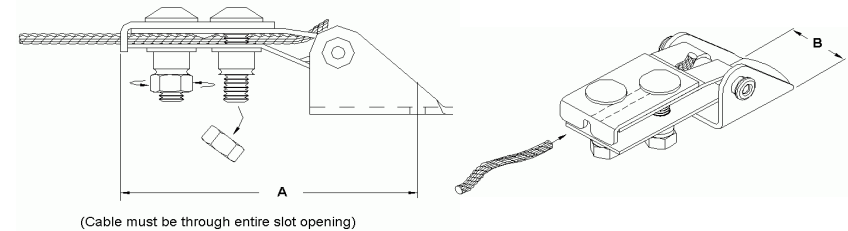

## FEATURES

- \* Quick installation (no shackles, thimbles, u-bolts, clevis angles....)
- \* Cable easily slides into oversized front arch opening.
- \* Breakaway hexnuts assure verification of proper installation.
- \* Will swivel to final installation angle
- \* Low carbon steel, electro-galvanized finish


## APPLICATION

- \* For attachment of sway brace to structure or to hanger. Typically used with 7x19 strand core pre-stretched galvanized aircraft cable

## NOTES

1. Maximum load rating based on cable breaking strength.

## TYPICAL INSTALLATIONS

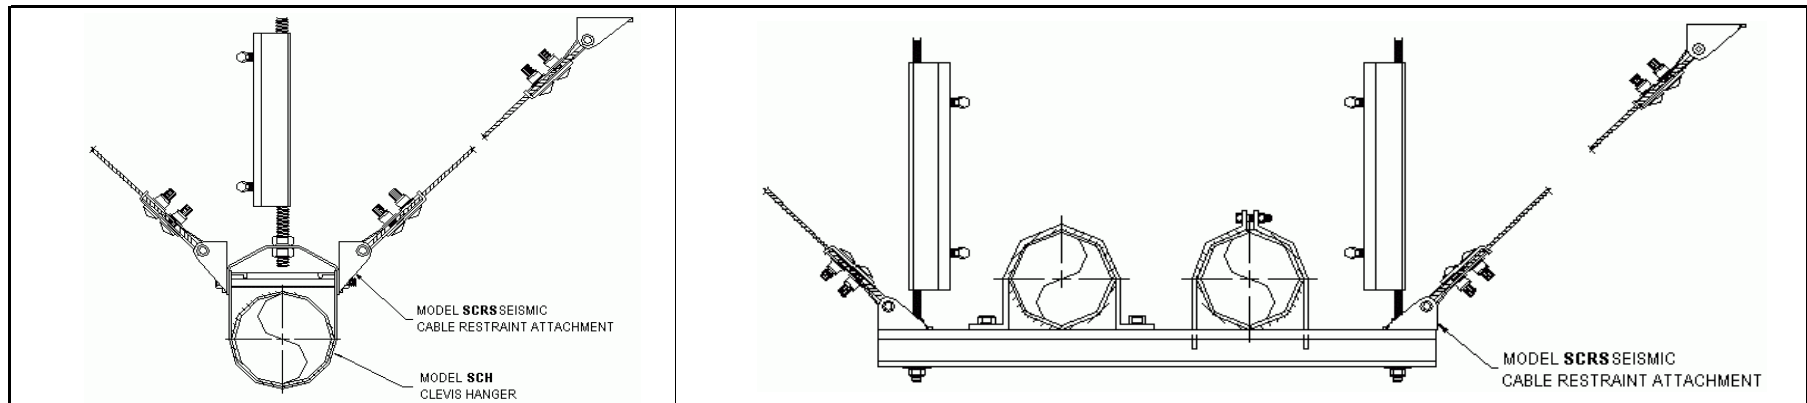

Notes / Remarks :

Project :

Client :

Consultant :

Representative :

Title :

**SCRS**  
**Seismic Cable Restraint**  
**System**

Drawing no.

**S-3100.31**

**Rev. 1**